
ROADWAY

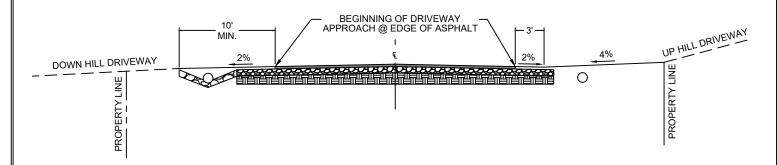

NOTES:

- DRIVEWAY APPROACHES SHALL SLOPE AWAY FROM ASPHALT AT 2% FOR A MINIMUM 10' BEYOND THE EDGE OF ASPHALT FOR DOWNHILL LOTS AND A MINIMUM OF 3' FOR UPHILL LOTS.
- 2. DRIVEWAY APPROACHES WITHIN THE CITY RIGHT OF WAY SHALL NOT EXCEED A GRADE OF 4%

| STANDARD# | DRAWN BY: BDS |
|-----------|------------------|
| | CHECKED BY: |
| 1 | ВТ |
| 4 | SCALE: |
| | N.T.S. |
| | DATE: |
| | 12/11/2019 |

CONSTRUCTION STANDARDS

TYPICAL DRIVE WAY CROSS SECTION



